

TECHNICAL SPECIFICATIONS

# THE REGINALD



# **REGINALD THEATRE** Technical Specifications

Seating 148, the Reginald is a studio theatre with fully retractable raked seating and a flexible stage area. It is an ideal venue for smaller companies to present new work of all kinds.

# **LIGHTING**

- Control 1 ETC ION console with fader wing
- 6 LSC Eko 24-way dimmers hardwired to patch outlet
- 12 Strand Prelude 16/30
- 4 Strand Prelude 28/40
- 10 Acclaim Axial 24/44
- 35 Acclaim fresnels
- 9 Selecon 1200w Rama hp fresnels
- 10 Par 64 MFL
- LED house light network that is switchable to DMX control

#### SOUND

- 1 Allen and Heath SQ-6
- 4 QSC HPR122i Powered Speaker
- 3 pin comms network throughout venue
- · Jands wired comms system throughout venue
- Show relay and paging to dressing rooms
- · Visual relay to backstage, dressing rooms and green rooms

#### **RIGGING**

- Fixed grid
- Genie Runabout GR-15

## SEATING


• The seating bank is motorised and can be fully retracted to make a black box space (13.5 metres by 12.5 metres). Seating can also be withdrawn to the following configurations:

• 1 row. • 7 rows.

• 5 rows. • 9 rows.

#### **STAGE DIMENSIONS**

Maximum floor, seating retracted	depth 13.53 metres	(44 feet, 4 inches)
	width 12.50 metres	(41 feet)
Stage size, seating extended	depth 6.50 metres	(21 feet, 3 inches)
	width 12.50 metres	(41 inches)
Double-doored backstage access	height 2.43 metres	(7 feet, 11 inches)
	width 1.97 metres	(6 feet, 5 inches)
Floor to underside of lighting grid	height 5.48 metres	(17 feet, 11 inches)
Floor to underside of roof beams	height 6.62 metres	(21 feet, 8 inches)
Floor to underside of gallery	height 3.47 metres	(11 feet, 4 inches)
• Gallery (over)	width 1.82 metres	(5 feet, 11 inches)

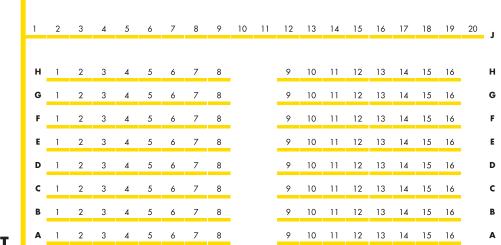

# EXIT



## **STAGE**

